




BONDAL / BONDAL COATED
ALU / STEEL SANDWICH SOUND FINISHING PANELS

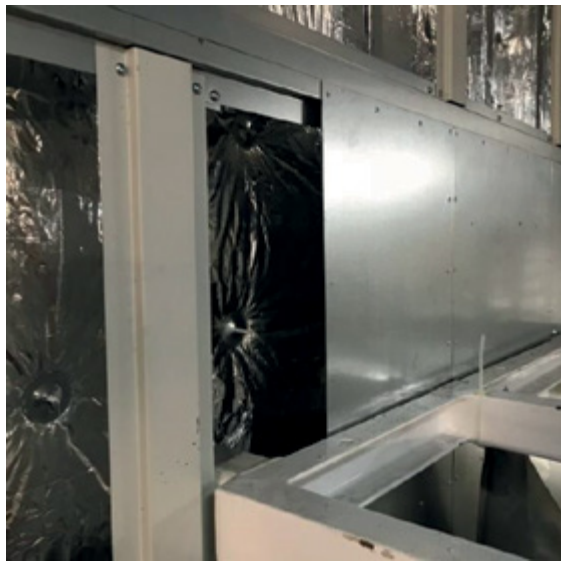

BONDAL ALUMINIUM
BONDAL STEEL

Finish sandwich panels

Alluminio / Steel
2000x1000 mm
2500 x 2500 mm

Thickness: ALU
1,55 – 2,05 – 3,05
Std: 2,8 kg/m² per mm sp.

Thickness: STEEL
1,55 – 2,05
Std: 7,8 kg/m² per mm sp.


IMO MED

Panels can be pre-coated with a polyester coating.

Standard colors are RAL9003 and RAL9010.

Both are coated in high gloss.

Correction can be made with polyester paint or after using a primer a polyurethane paint. Maximum temperature for the coating is 70 degrees Celsius.

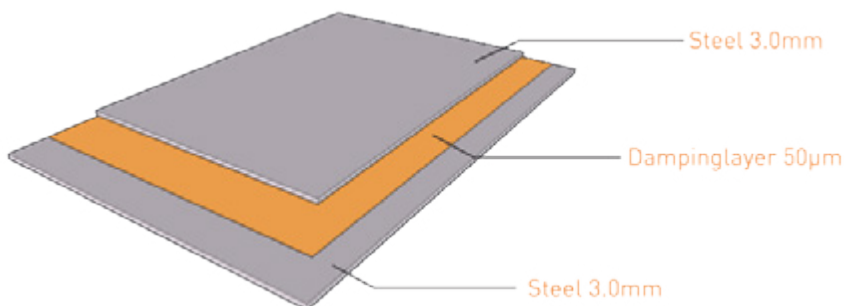

PULL
INDUSTRIAL