

Phonkiller M2C Carbon

Description

Phonkiller M2C Carbon is our solution to combine structural born damping with an easy applicable apply method. Phonkiller M2C meets the need to create a higher comfort level on board without any fire or health risks.



Less weight
More possibilities

Weight reduction

This anti drumming paste has one of the lowest densities in the market. Herewith the added weight is reduced to the minimum.




Less noise
More comfort

High damping

The acoustical performance is mentioned in the graphic below. A monolithic counter sheet can be used as well. This will not influence the performance.

Loss factor Phonkiller M2C Carbon

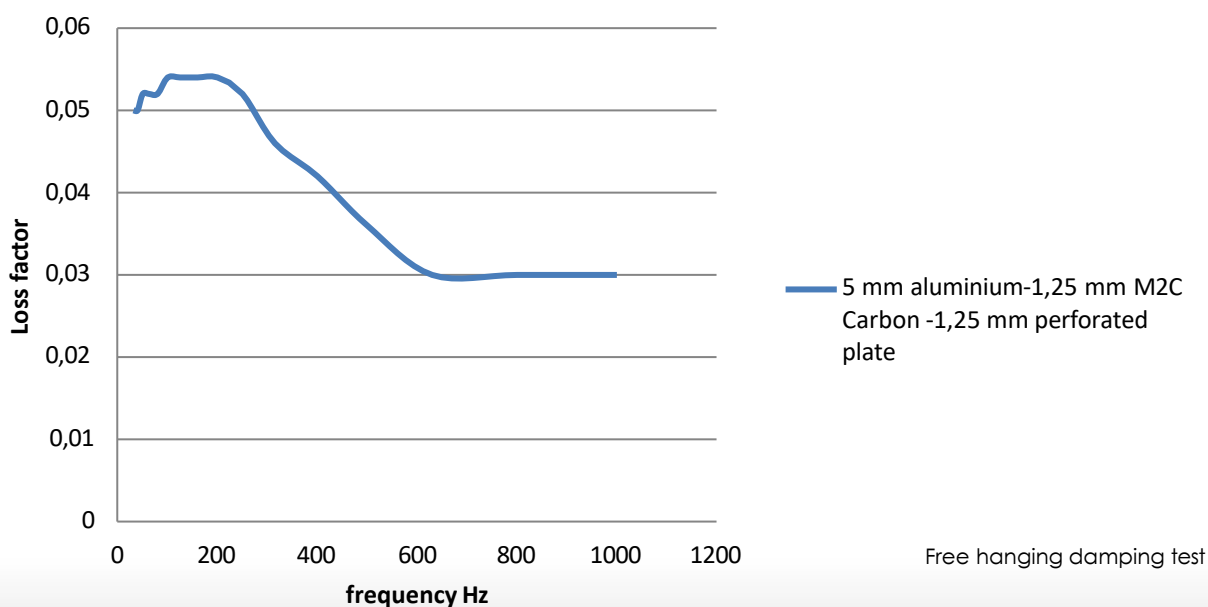



Less Work
More results

Quick and Easy

In comparing most anti drumming systems, which are 2-component products, applying of Phonkiller M2C Carbon is faster. Advise is to apply Phonkiller M2C Carbon with a spatula. After opening the bucket, Phonkiller M2C Carbon starts curing after 15 minutes. Processing temperature between +5 and 40 degrees.



Less vibrations
More Layers

Material

Phonkiller M2C Carbon is an almost pure MS polymer. Therefore it contains almost non-flammable particles.

Bondal® Aluminium properties

Material colour	Antracite
Dimension	Buckets of 20 Litres
Applying	With counter sheet in ratio 4:1:1
Test results	Test results are available on request
Environment	M.S.D.S. on request available
Coating	Painting is possible
Weight	1,41 kg/m ² per mm thickness
Certificate	IMO certificated (on request available)



Less products –
more applications

Applications:

- ceilings
- walls
- air ducts
- glue